


DF140BG / DF140B | DF115BG / DF115B



THE
ULTIMATE
OUTBOARD MOTOR

DIMENSIONS

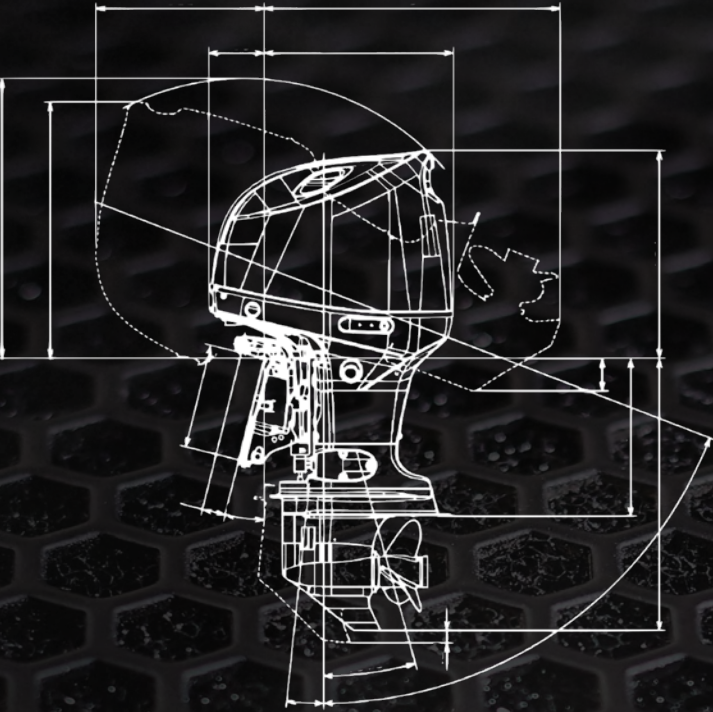

TRANSOM	A	B	C	D
X	661	1047	1121	156
L	534	920	1002	110

FEATURES

NOISE REDUCTION

SELF-ADJUSTING TIMING CHAIN

ANTI CORROSION

TILT LIMIT

EASY START SYSTEM

WATER DETECTING SYSTEM

OFFSET DRIVESHAFT

2.59 GEAR RATIO

LEAN BURN

MPC

OPTIONAL EXTRA'S

KEYLESS START SYSTEM

TROLL MODE

SDSM+

AUTOMATIC TRIM

SUB WATER INLET



SPECIFICATIONS

	DF140BG / DF115BG	DF140B / DF115B
Starting System	Electric	
Recommended Transom Height (mm)	L: 508 X: 635	
Weight (kg)	L: 188 L: 190 X: 192 X: 194	L: 186 L: 188 X: 190 X: 192
Valve Train	DOHC 16-Valve	
Valve Train Drive	Chain	
Displacement (cm ³)	2,045	
Maximum Output (kW)	103.0 84.6 1013.0 84.6	
Bore and Stroke (mm)	86 x 88	
Operation Range (rpm)	5,700 5,000 5,700 5,000 -6,300 - 6,000 - 6,300 - 6,000	
Fuel Delivery System	Electronic Fuel Injection	
Oil Pan Capacity (L)	5.5	
Alternator	12V 40A	
Trim Type	Power Trim and Tilt	
Gear Ratio	2.59:1	
Control System	Drive by Wire	Mechanical
Recommended Fuel	RON91 / AKI 87	
Propeller Selection (pitch)	15"-25" (R/R)	



Suzuki Motor Corporation
TAKATSUKA, CHUO, HAMAMATSU, JAPAN

ENVIRONMENTAL



STEALTH LINE™



DF115BG / DF115B DF140BG / DF140B DF150AP / DF150A DF200AP / DF200A

**BOLD
STYLISH
QUIET**

MATTE BLACK

The "ONE" is characterised by quiet yet robust performance, exhibiting exceptional endurance. Suzuki outboard engines have consistently been described in these terms. Now, the external design of our engines aligns with the high standards set by this renowned engine series.

CHROME BLACK GRAPHICS

Introducing the bold new STEALTH LINE™ of engines from Suzuki Marine, featuring distinctive style lines, a sleek matte black finish, and uncompromising performance. This new lineup solidifies Suzuki Marine as the ultimate choice for outboard motors.



DF250AUN

DF300AP

DF350AMD / DF350A

BoatingIndustry

TOP PRODUCTS

2024

The Stealth Line Outboard won the 2024 Top Products Award from Boating Industry Magazine for honoring customers' and builders' demands with an innovative, stylish, bold look.

GOT THE LOOK

STEALTH LINE™

**DURABLE
RELIABLE
POWERFUL**

FEATURES



SUZUKI DUAL PROP SYSTEM

DF350AMD / DF350A

The Suzuki Dual Prop System uses two propellers rotating in opposite directions on a single engine, providing enhanced stability, powerful reverse thrust, and improved water-gripping performance.



SUZUKI DUAL LOUVER SYSTEM

DF350AMD / DF350A

Dog leg-shaped dual louver at the air intake removes water and prevents intrusion, allowing a direct intake system for higher engine output.



INTEGRATED STEERING SYSTEM

DF350AMD

The conventional external hydraulic cylinder is integrated into the outboard motor. This allows for a clean motorwell appearance and easy rigging to various boat types.



SUZUKI PRECISION CONTROL (SPC)

DF350AMD / DF350A / DF300AP / DF250AUN
DF200AP / DF150AP / DF140BG / DF115BG

Suzuki Precision Control is an advanced computer-based control system that replaces mechanical control cables with electronic wiring for smooth throttle and shift operation. The system offers precise control for single, twin, or triple installation, as well as dual station operation. It also features built-in systems to prevent engine and drive damage, with easy installation thanks to its simple wiring design.



VARIABLE VALVE TIMING (VVT)

DF350AMD / DF350A / DF300AP
DF250AUN / DF200AP / DF200A / DF150AP

The Variable Valve Timing controls the opening and closing timing of the intake valve depending on the engine RPM, it offers extra torque for low to mid-range acceleration by optimizing intake valve timing.



DUAL INJECTOR

DF350AMD / DF350A

The dual injector delivers precise fuel amounts to each cylinder, improving output and fuel efficiency.



SUZUKI SELECTIVE ROTATION

DF300AP / DF200AP / DF150AP

Select regular or counter rotation on one outboard with an optional connector and propeller. Either rotation can be used on the same outboard.



DUAL WATER INLET

DF350AMD / DF350A / DF300AP

The engine's cooling system uses dual low water intakes on the lower unit to increase water flow and improve cooling efficiency. The forward inlet is positioned at the gear case nose to provide ample water supply at high speeds, while the second inlet is lower for shallow water operation.





MULTI STAGE INDUCTION

DF200AP / DF200A / DF150AP / DF150A

Manifold pipes change between short and long to adjust air volume for the engine. This increases output during high speed and improves combustion efficiency and torque at low speed.



SELF-ADJUSTING TIMING CHAIN

ALL MODELS


The timing chain in an oil bath needs no maintenance and adjusts itself with a reliable hydraulic tensioner, offering greater durability than a belt-type chain.



OFF SET DRIVE SHAFT

ALL MODELS

The outboard's center of gravity is moved forward by positioning the engine powerhead closer to the front, resulting in less vibration, more compact size and stable steering performance.



2 STAGE GEAR REDUCTION

ALL MODELS

The Offset Driveshaft system has two stages of reduction, allowing it to turn large propellers with high efficiency, powerful navigation, and quick acceleration.



SUZUKI EASY START SYSTEM

ALL MODELS

Simply turn the key and release, and the starter stays engaged until the engine starts. This system offers a smoother start of the engine



TILT LIMIT SYSTEM

ALL MODELS

A Tilt Limit System prevents outboard from tilting beyond a certain angle, avoiding damage to the boat or outboard.



LEAN BURN CONTROL SYSTEM

ALL MODELS

The Lean Burn Control System provides optimized fuel-air mixture based on navigation conditions. It enhances fuel economy across all speeds, especially during cruising, resulting in fuel savings and reduced gasoline expenses.




SUZUKI ANTI-CORROSION FINISH

ALL MODELS

Suzuki's Anti-Corrosion finish is designed to provide the ultimate protection for your outboard. By applying a robust protective layer using high-strength bonding, the exterior parts made of aluminum are shielded against corrosion, ensuring unparalleled durability.


Resin Clear Topcoat
Resin Black(or White)
Basecoat
Primer Undercoat
Suzuki Anti-Corrosion Finish
Suzuki Aluminium Alloy



WATER DETECTING SYSTEM

ALL MODELS

The Water Detecting System alerts the driver when water is present in the fuel, preventing issues such as poor combustion, lower power output, and corrosion.



NOISE REDUCTION

DF350AMD / DF350A / DF200AP / DF200A / DF150AP
DF150A / DF140BG / DF140B / DF115BG / DF115B

Noise reduction is achieved by suppressing intake noise with a silencer and resonator, resulting in a quieter outboard noise, and providing a more pleasant boating experience.




MICRO PLASTIC COLLECTING DEVICE

DF140BG / DF140B / DF115BG / DF115B

One of the initiatives under the Suzuki Clean Ocean Project involves the development of a device that can collect microplastics from the ocean simply by running Suzuki outboard motors. The advantage of this device is that it is able to collect microplastics without compromising the performance of the outboard motor..




OPTIONAL EXTRA'S



SUZUKI ANTI-CORROSION FINISH

ALL MODELS

Suzuki's Troll Mode system provides precise control over engine speed at low rpms for constant trolling. The system uses an independent control switch to adjust revs in 50rpm increments from idle to 1,200rpm. It comes with a convenient control switch and tachometer.



AUTOMATIC TRIM

ALL MODELS

The Automatic Trim adjusts the trim angle automatically based on the engine RPM, without the need for manual control. This helps to maintain the trim angle and improve the top speed and fuel efficiency.



KEYLESS START SYSTEM

ALL MODELS

Start your outboard motor without inserting the key by simply having the key-fob nearby. This system helps deter theft more effectively than a traditional key system.



SUZUKI DIAGNOSTIC SYSTEM MOBILE PLUS (SDSM+)


ALL MODELS

SDSM+ is an advanced app for boats attached to SMG4 that provides a unique and satisfying boating experience. It allows you to plan your boat trip, check the condition of your boat and engines, inspect them before departure, and provide engine data to the dealer for maintenance.

DURABLE RELIABLE POWERFUL



FEATURES

 INTEGRATED STEERING SYSTEM	 DUAL INJECTOR	 DUAL LOUVER	 DUAL PROP
 NOISE REDUCTION	 LEAN BURN	 DUAL WATER INLET	 SELF-ADJUSTING TIMING CHAIN
 WATER DETECTING SYSTEM	 EASY START SYSTEM	 PRECISION CONTROL	 VARIABLE VALVE TIMING
 ANTI CORROSION	 OFFSET DRIVESHAFT	 2.29 GEAR RATIO	 TILT LIMIT
 DIRECT INTAKE			

OPTIONAL EXTRA'S

 KEYLESS START SYSTEM	 TROLL MODE	 SDSM+	 AUTOMATIC TRIM
--	--	---	--



FEATURES

- INTEGRATED STEERING SYSTEM
- DUAL INJECTOR
- DUAL LOUVER
- DUAL PROP
- NOISE REDUCTION
- LEAN BURN
- DUAL WATER INLET
- SELF-ADJUSTING TIMING CHAIN
- WATER DETECTING SYSTEM
- EASY START SYSTEM
- PRECISION CONTROL
- VVT
- VARIBLE VALVE TIMING
- ANTI CORROSION
- OFFSET DRIVESHAFT
- 2.29 GEAR RATIO
- TILT LIMIT
- DIRECT INTAKE

OPTIONAL EXTRA'S

- KEYLESS START SYSTEM
- TROLL MODE
- SDSM+
- AUTOMATIC TRIM



SPECIFICATIONS

	DF350AMD / DF350A		
Starting System	Electric		
Recommended Transom Height (mm)	L: 508 X: 635 XX: 762	X: 635 XX: 765	
Weight (kg)	L: 345 X: 352 XX: 360	X: 330 XX: 338	
Valve Train	DOHC 24-Valve		
Valve Train Drive	Chain		
Displacement (L/cyl.)	4,390		
Maximum Output (kW)	257.4		
Bore and Stroke (mm)	98 x 97		
Operation Range (rpm)	5,700 - 6,300		
Fuel Delivery System	Electronic Fuel Injection		
Oil Pan Capacity (L)	8.0		
Alternator	12V 54 A		
Trim Type	Power Trim and Tilt		
Gear Ratio	2.29:1		
Control System	Drive By Wire		
Recommended Fuel	RON94 / AKI 89		
Propeller Selection (pitch)	12"-31.5"		

TRANSOM	A	B	C	D	E	X	Y	Z
XX	762	2,168	1,377	37	203			
X	635	2,041	1,259	37	155	68°	4°	12°
L	508	1,914	1,141	37	108			

SPECIFICATIONS

	DF350AMD / DF350A		
Starting System	Electric		
Recommended Transom Height (mm)	L: 508 X: 635 XX: 762	X: 635 XX: 765	
Weight (kg)	L: 345 X: 352 XX: 360	X: 330 XX: 338	
Valve Train	DOHC 24-Valve		
Valve Train Drive	Chain		
Displacement (L/cyl.)	4,390		
Maximum Output (kW)	257.4		
Bore and Stroke (mm)	98 x 97		
Operation Range (rpm)	5,700 - 6,300		
Fuel Delivery System	Electronic Fuel Injection		
Oil Pan Capacity (L)	8.0		
Alternator	12V 54 A		
Trim Type	Power Trim and Tilt		
Gear Ratio	2.29:1		
Control System	Drive By Wire		
Recommended Fuel	RON94 / AKI 89		
Propeller Selection (pitch)	12"-31.5"		

TRANOM	A	B	C	D	E	X	Y	Z
XX	762	2,168	1,377	37	203			
X	635	2,041	1,259	37	155	68°	4°	12°
L	508	1,914	1,141	37	108			

SPECIFICATIONS

	DF350AMD / DF350A		
Starting System	Electric		
Recommended Transom Height (mm)	L: 508 X: 635 XX: 762	X: 635 XX: 765	
Weight (kg)	L: 345 X: 352 XX: 360	X: 330 XX: 338	
Valve Train	DOHC 24-Valve		
Valve Train Drive	Chain		
Displacement (L/cyl.)	4,390		
Maximum Output (kW)	257.4		
Bore and Stroke (mm)	98 x 97		
Operation Range (rpm)	5,700 - 6,300		
Fuel Delivery System	Electronic Fuel Injection		
Oil Pan Capacity (L)	8.0		
Alternator	12V 54 A		
Trim Type	Power Trim and Tilt		
Gear Ratio	2.29:1		
Control System	Drive By Wire		
Recommended Fuel	RON94 / AKI 89		
Propeller Selection (pitch)	12"-31.5"		

TRANSOM	A	B	C	D	E	X	Y	Z
XX	762	2,168	1,377	37	203			
X	635	2,041	1,259	37	155	68°	4°	12°
L	508	1,914	1,141	37	108			



DIMENSIONS

FOWARD

698 972
(101) (871)
32° 32°
(281.5) (281.5)
563
512 512

1310
1218
382
988
A B
C D
E F
G H
I J
K L
M N
O P
Q R
S T
U V
W X
Y Z
159

Unit: mm (in)

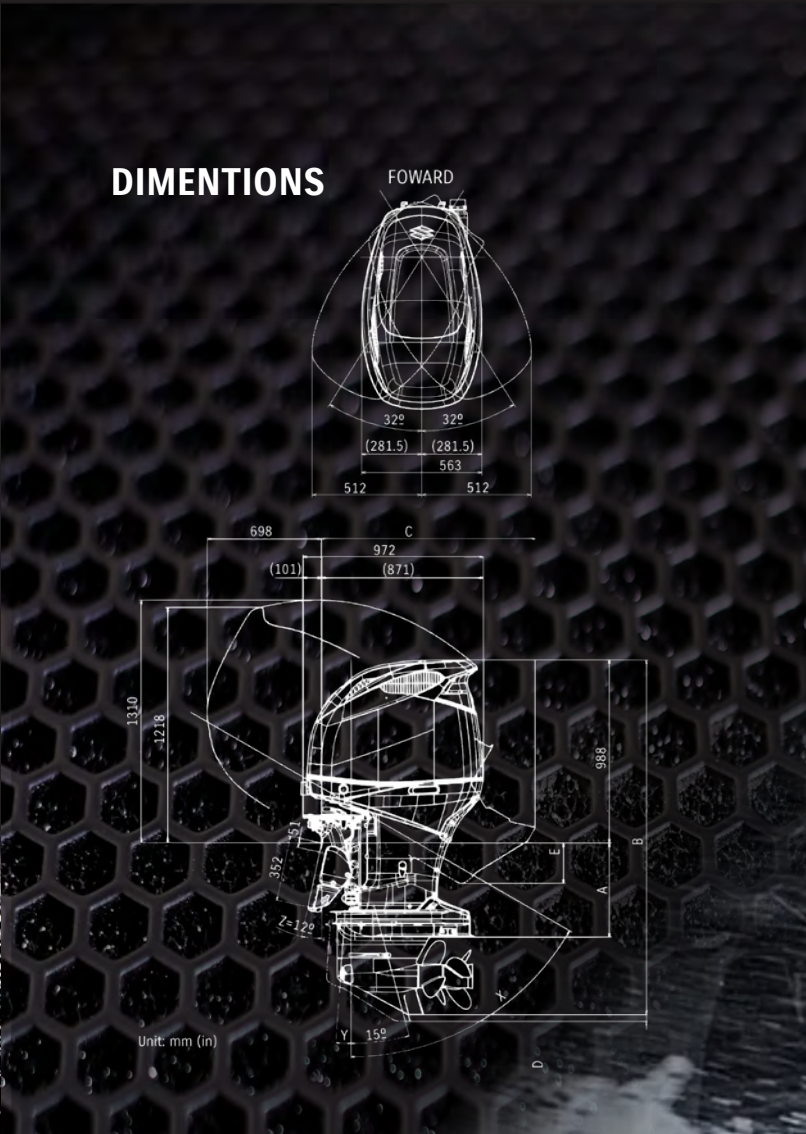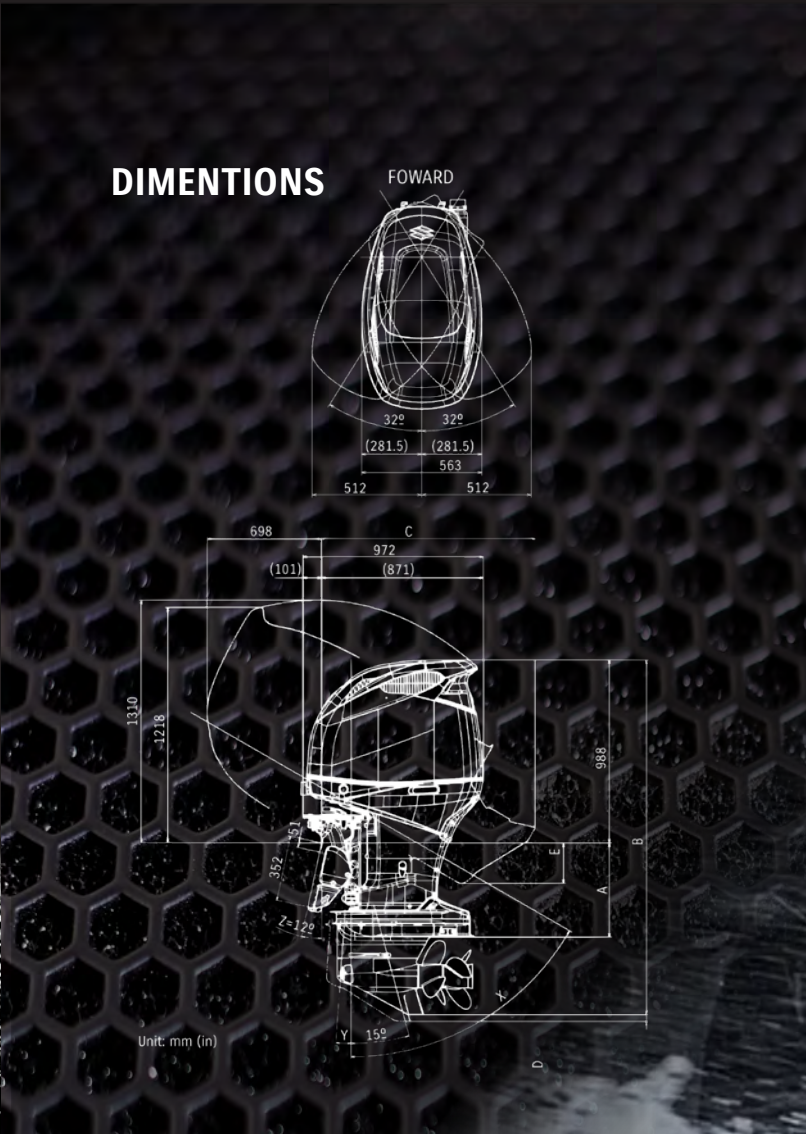

DIMENSIONS

FORWARD

32° 32°
282 282
(564)
497 497

661 1253
178 1147
(953)
157 775

1151 1089

81 126


286 338 625 762 1899 2026

829

600

33 32

Unit: mm (in)

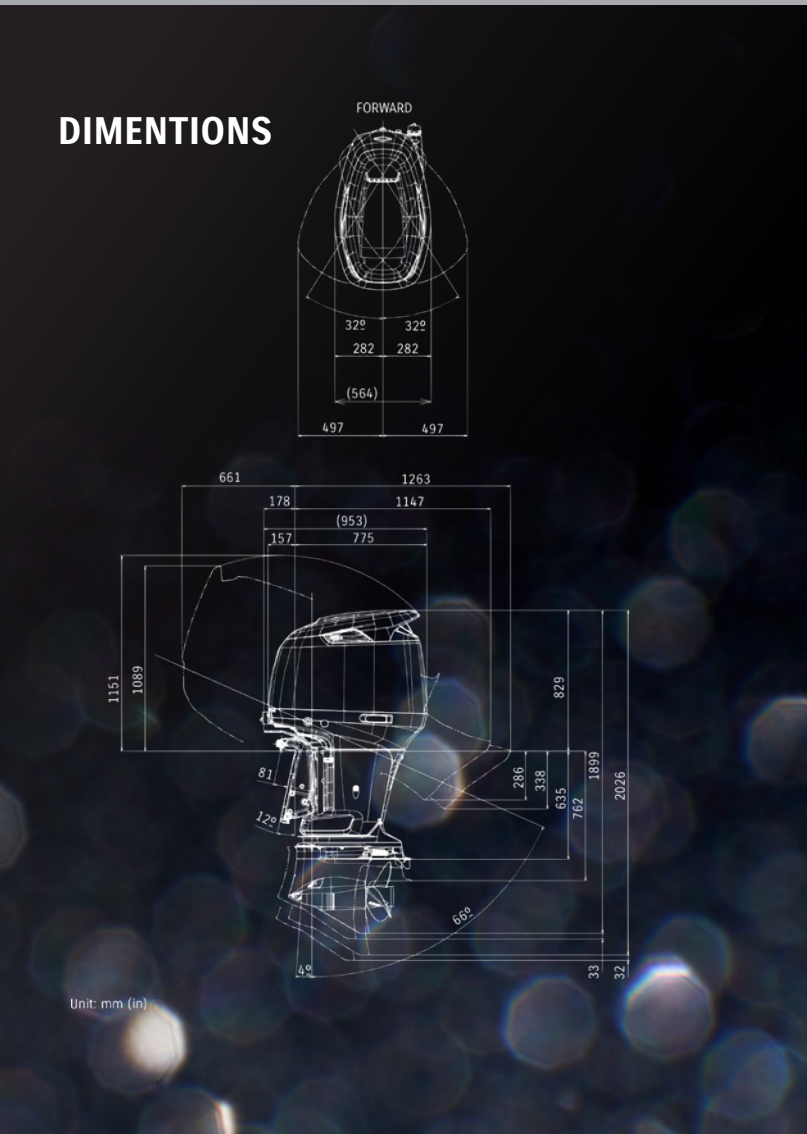

DIMENSIONS

FORWARD

32° 32°
282 282
(564)
497 497

661 1253
178 1147
(953)
157 775

1151 1089

81 126

286 338 625 762 1899 2026

829

600

33 32

Unit: mm (in)

SPECIFICATIONS	
Starting System	Electric
Recommended	L: 508
Transom Height (mm)	X: 635
	XX: 762
Weight (kg)	L: 284
	X: 290
	XX: 299
Valve Train	DOHC 24-Valve
Valve Train Drive	Chain
Displacement (cm ³)	4,028
Maximum Output (kW)	220.7
Bore and Stroke (mm)	98 x 89
Operation Range (rpm)	5,700 - 6,300
Fuel Delivery System	Electronic Fuel Injection
Oil Pan Capacity (L)	8.0
Alternator	12V 54 A
Trim Type	Power Trim and Tilt
Gear Ratio	2.08:1
Control System	Drive By Wire
Recommended Fuel	RON91 / AKI 87
Propeller Selection (pitch)	15"-27.52 (R/R)
	17"-26" (C/R)

SPECIFICATIONS	
Starting System	Electric
Recommended	L: 508
Transom Height (mm)	X: 635
	XX: 762
Weight (kg)	L: 284
	X: 290
	XX: 299
Valve Train	DOHC 24-Valve
Valve Train Drive	Chain
Displacement (cm ³)	4,028
Maximum Output (kW)	220.7
Bore and Stroke (mm)	98 x 89
Operation Range (rpm)	5,700 - 6,300
Fuel Delivery System	Electronic Fuel Injection
Oil Pan Capacity (L)	8.0
Alternator	12V 54 A
Trim Type	Power Trim and Tilt
Gear Ratio	2.08:1
Control System	Drive By Wire
Recommended Fuel	RON91 / AKI 87
Propeller Selection (pitch)	15"-27.52 (R/R)
	17"-26" (C/R)




FEATURES

PRECISION CONTROL	VVT VARIABLE VALVE TIMING	TILT LIMIT	SELECTIVE ROTATION
EASY START SYSTEM	DUAL WATER INLET	OFFSET DRIVESHAFT	2.08 GEAR RATIO
LEAN BURN	SELF-ADJUSTING TIMING CHAIN	WATER DETECTING SYSTEM	ANTI CORROSION

OPTIONAL EXTRA'S

KEYLESS START SYSTEM	TROLL MODE	SDSM+	AUTOMATIC TRIM
--	--	---	--

LTH LINE™

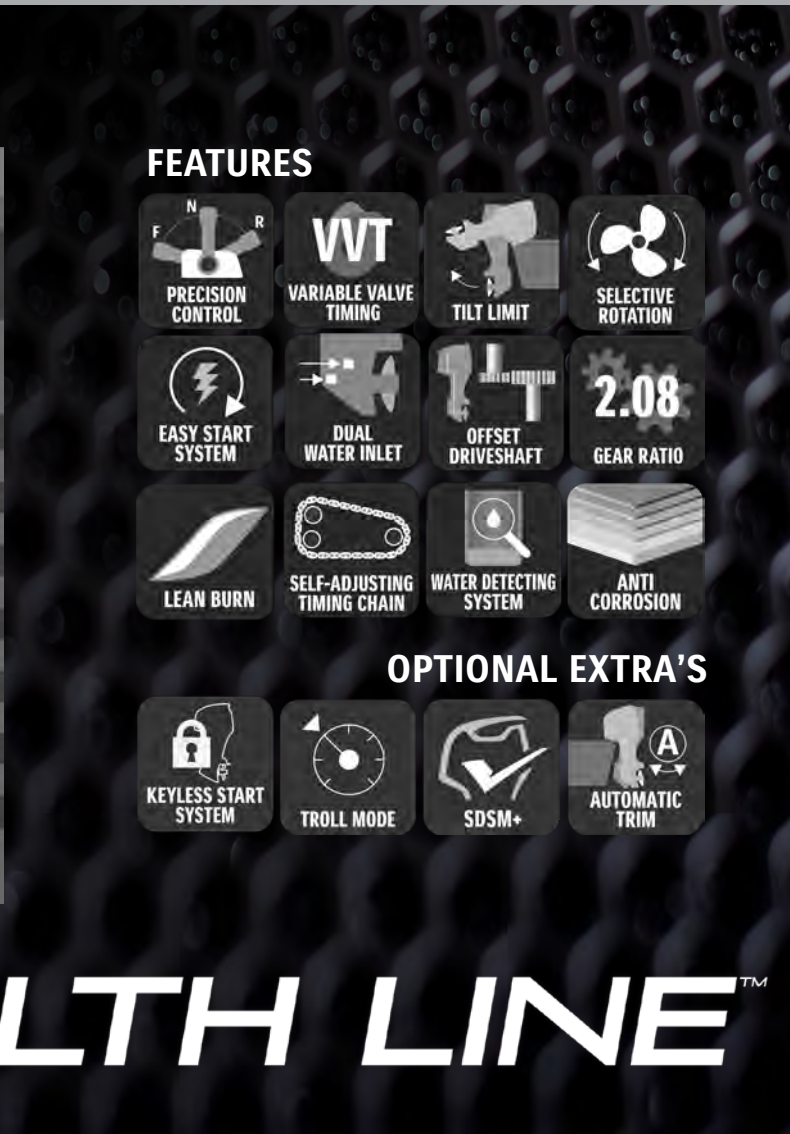


FEATURES

PRECISION CONTROL	VVT VARIABLE VALVE TIMING	TILT LIMIT	SELECTIVE ROTATION
EASY START SYSTEM	DUAL WATER INLET	OFFSET DRIVESHAFT	2.08 GEAR RATIO
LEAN BURN	SELF-ADJUSTING TIMING CHAIN	WATER DETECTING SYSTEM	ANTI CORROSION

OPTIONAL EXTRA'S

KEYLESS START SYSTEM	TROLL MODE	SDSM+	AUTOMATIC TRIM
--	--	---	--

LTH LINE™

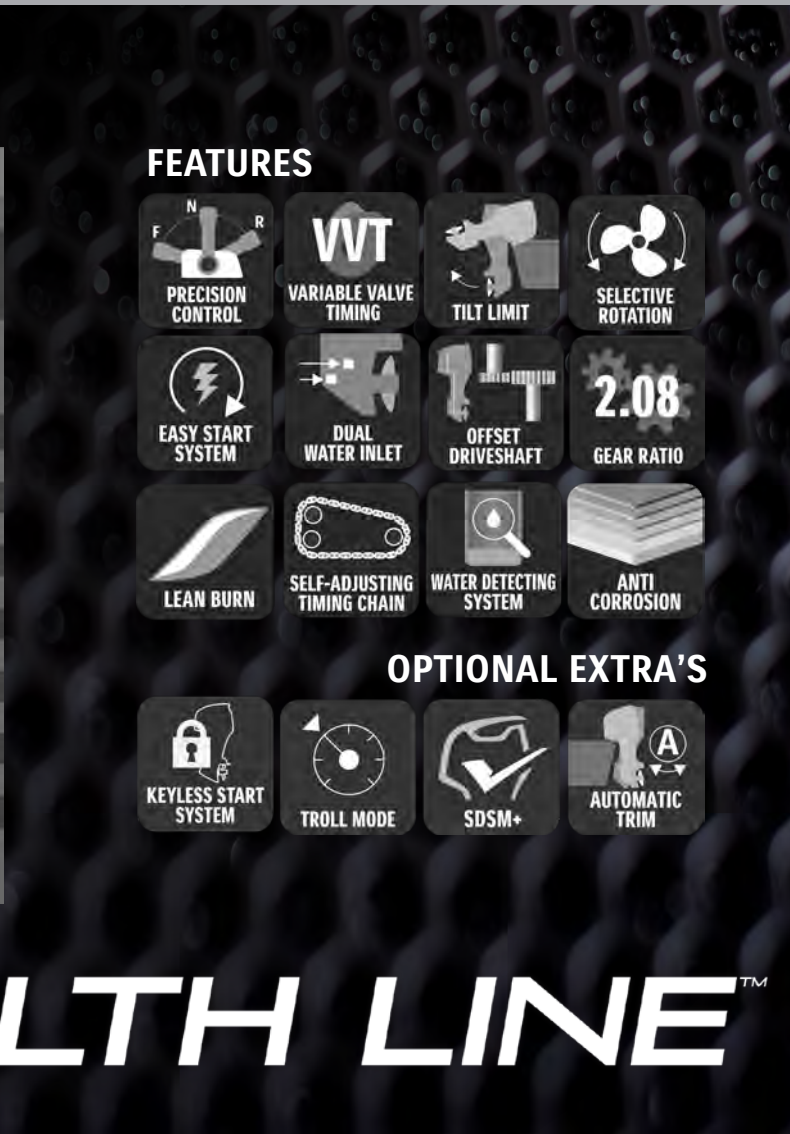

DF300AP

STEALTH LINE™

DF250AUN

FEATURES

2.08
GEAR RATIO

SELF-ADJUSTING
TIMING CHAIN

WATER DETECTING
SYSTEM

EASY START
SYSTEM

VVT
VARIABLE VALVE
TIMING

ANTI
CORROSION

OFFSET
DRIVESHAFT

LEAN BURN

PRECISION
CONTROL

TILT LIMIT

OPTIONAL EXTRA'S

KEYLESS START
SYSTEM

TROLL MODE


SDSM+

AUTOMATIC
TRIM


SPECIFICATIONS

	DF250AUN
Starting System	Electric
Recommended	L: 508
Transom Height (mm)	X: 635
Weight (kg)	L:284
	X: 290
Valve Train	DOHC 24-Valve
Valve Train Drive	Chain
Displacement (cm3)	4,028
Maximum Output (kW)	183.9
Bore and Stroke (mm)	98 x 89
Operation Range (rpm)	5,700 - 6,300
Fuel Delivery System	Electronic Fuel Injection
Oil Pan Capacity (L)	8.0
Alternator	12V 54 A
Trim Type	Power Trim and Tilt
Gear Ratio	2.08:1
Control System	Drive By Wire
Recommended Fuel	RON91 / AKI 87
Propeller Selection (pitch)	15"-27.52 (R/R)

DIMENTIONS

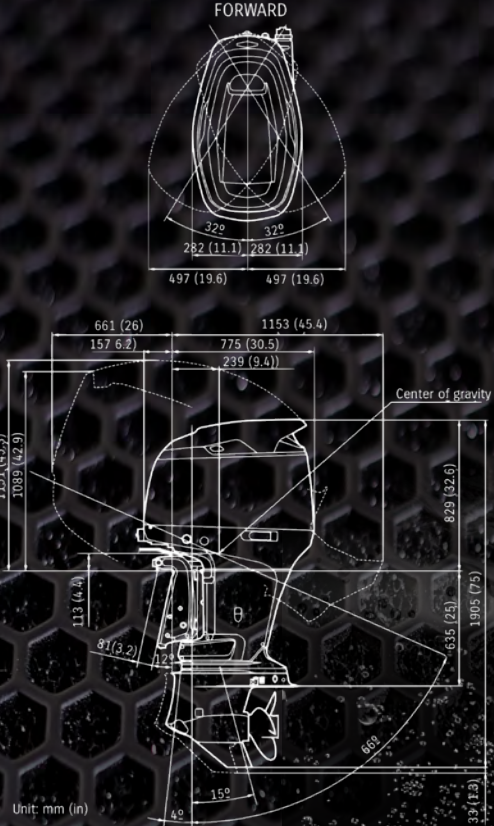

DIMENTIONS

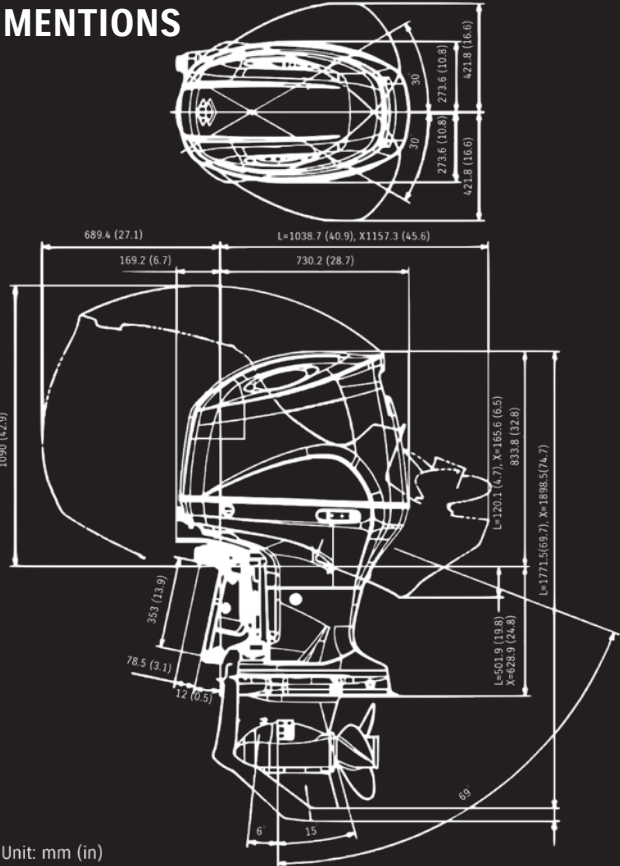

FEATURES

LEAN BURN

VVT
VARIABLE VALVE
TIMING

EASY START
SYSTEM

2.50
GEAR RATIO

ANTI
CORROSION

OFFSET
DRIVESHAFT

WATER DETECTING
SYSTEM

TILT LIMIT

MULTI-STAGE
INDUCTION

NOISE
REDUCTION

SELF-ADJUSTING
TIMING CHAIN

OPTIONAL EXTRA'S

KEYLESS START
SYSTEM

TROLL MODE

SDSM+

AUTOMATIC
TRIM

SPECIFICATIONS

	DF200AP / DF150AP DF200A / DF150A			
Starting System	Electric			
Recommended	L: 508			
Transom Height (mm)	X: 635			
Weight (kg)	L:236		L: 235	
	X:241		X: 240	
Valve Train	DOHC 16-Valve			
Valve Train Drive	Chain			
Displacement (cm3)	2,867			
Maximum Output (kW)	147.1 110.3			
Bore and Stroke (mm)	97 x 97			
Operation Range (rpm)	5,500	5,000	5,500	5,000
	-6,100	-6,000	-6,100	-6,000
Fuel Delivery System	Electronic Fuel Injection			
Oil Pan Capacity (L)	8.0			
Alternator	12V 44A			
Trim Type	Power Trim and Tilt			
Gear Ratio	2.50:1			
Control System	Drive by Wire Mechanical			
Recommended Fuel	RON91 / AKI 87			
Propeller Selection (pitch)	15"-27.52 (R/R)			

STEALTH LINE™

DF200AP / DF200A | DF150AP / DF150A